

SANDHYA FLEX RUBBERS & PVC PRODUCTS

AN ISO 9001:2015 Certified Company

Supplier and Exporter of Rubber and PVC Products.

ADDRESS: Plot No 5-24-743/1/A, CHANDRAGIRI NAGAR, GAJULARAMARAM, Medchal Dist.,500055, Telangana State, India.

Mobile No: Mob: 9550921831,9392277917,.

Email: sandhyaflex2020@gmail.com,sandhyaflexsales@gmail.com


Website: www.sandhyaflexrubber.com

PVC NYLON BRAIDED PIPE

PVC Braided Hoses

PVC Braided Hoses made from high quality thermoplastic compound and reinforced (braided) with high tenacity synthetic yarn (crosswise - lengthwise). The excellent ply adhesion and bonding between the inner and upper layer of PVC ensures a durable pipe. The braiding gives the hose high strength and resistance to withstand high pressure and elongation. Our production of hoses meets the most stringent operational requirements. Transparent hoses facilitate the location of blockage in use. The smooth inner bore prevents any build - up and offers minimum resistance to flow. The working pressure of the hose is dependent on temperature and is lowered with increase in temperature. Available in various grades as Clear Transparent, Super Spray (Car Washing), Agricultural Pesticide, Green Garden Water, Sanitary, Fire Fighting, Rock Drill, Welding etc.

Features: Withstand high pressure, Light weight compared to rubber hose, Clear transparent, Working temperature up to 60 o C, High flexibility, Long working life and durability, Chemical and abrasion resistance, Excellent ply adhesion, Crush and kink resistance, Opaque if required, Rodent proof

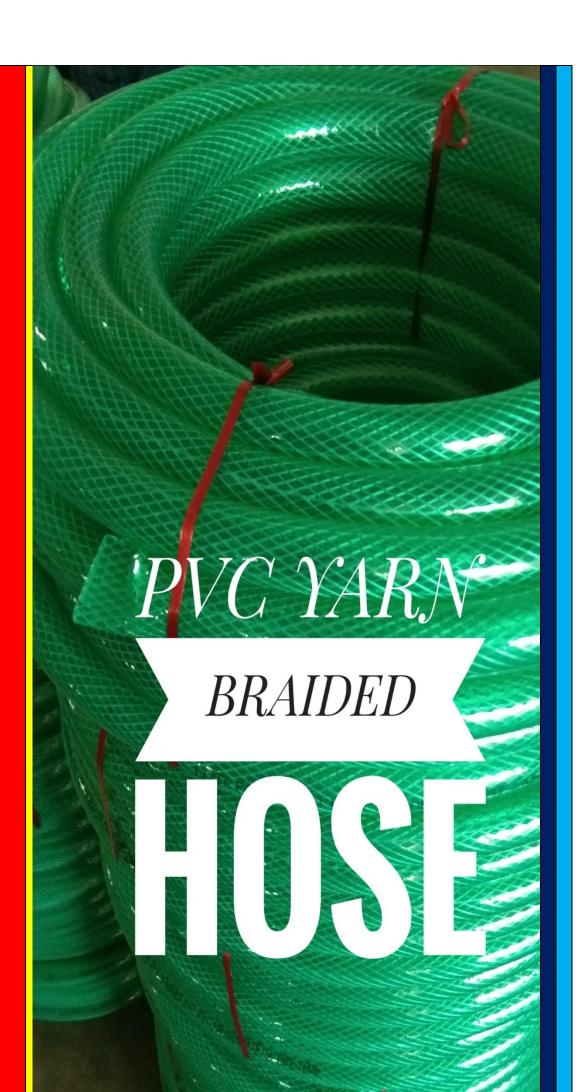







SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYAFLEX SANDHYAFES



i SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFES

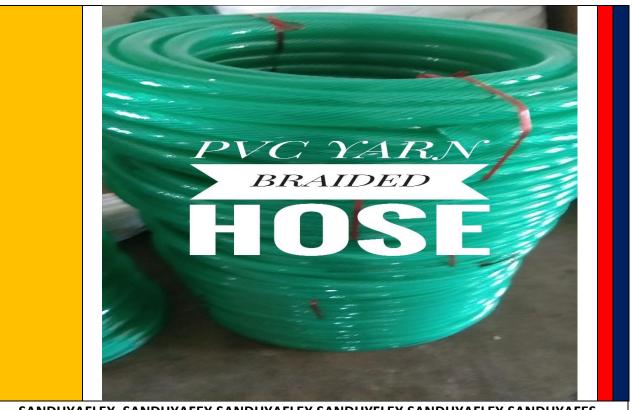


SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFES

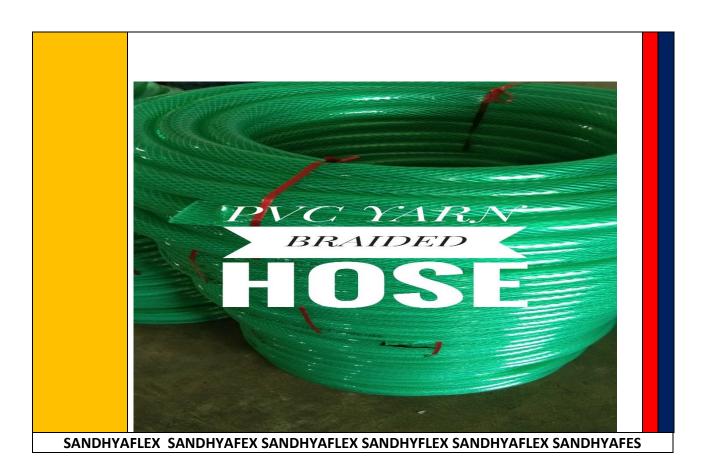



SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYAFLEX SANDHYAFES

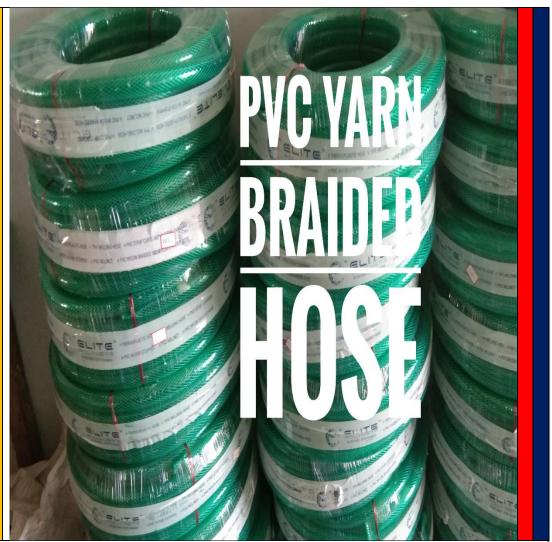

SANDHYAFLEX SANDHYAFEX SANDHYAFLEX SANDHYFLEX SANDHYAFLEX SANDHYAFES

PVC Braided Hoses

PVC Braided Hoses made from high quality thermoplastic compound and reinforced (braided) with high tenacity synthetic yarn (crosswise - lengthwise). The excellent ply adhesion and bonding between the inner and upper layer of PVC ensures a durable pipe. The braiding gives the hose high strength and resistance to withstand high pressure and elongation. Our production of hoses meets the most stringent operational requirements. Transparent hoses facilitate the location of blockage in use. The smooth inner bore prevents any build - up and offers minimum resistance to flow. The working pressure of the hose is dependent on temperature and is lowered with increase in temperature. Available in various grades as Clear Transparent, Super Spray (Car Washing), Agricultural Pesticide, Green Garden Water, Sanitary, Fire Fighting, Rock Drill, Welding etc.

Features: Withstand high pressure, Light weight compared to rubber hose, Clear transparent, Working temperature up to 60 o C, High flexibility, Long working life and durability, Chemical and abrasion resistance, Excellent ply adhesion, Crush and kink resistance, Opaque if required, Rodent proof

1	PVC Nylon Braided Pipe (REGULAR)
2	TVE NYION BIGIOCUTIPE (NEOCETR)
	6mm ID White Transparent Premium Quality, Working Pressure 20.0kg/cm2. Length-100Mtr/Roll
3	
	8mm ID White Transparent Premium Quality, Working Pressure 20.0kg/cm2. Length-100Mtr/Roll
4	
	10mm ID White Transparent Premium Quality, Working Pressure 14.0kg/cm2. Length-100Mtr/Roll
5	
	12mm ID White Transparent Premium Quality, Working Pressure 14.0kg/cm2. Length-100Mtr/Roll
6	
	16mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-50Mtr/Roll
7	
	20mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-150tr/Roll
8	
	25mm ID White Transparent Premium Quality, Working Pressure 10.0kg/cm2. Length-50Mtr/Roll
9	
	31mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll
10	
	40mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll
11	
	50mm ID White Transparent Premium Quality, Working Pressure 08.0kg/cm2. Length-30/50Mtr/Roll

BUSINESS POLICY

SANDHYA FLEX RUBBERS & PVC PRODUCTS AN ISO:9001:2015 Certified Company

Inquiry

Quotation



Performa Invoice

Advance Payment

Take in Production as per Purchase Order

After Completed Consignment Inform to Client for Balance Payment

Dispatch the Material

Provide LR Copy

Bank Details		
COMPANY NAME	SANDHYA FLEX RUBBERS & PVC PRODUCTS	
Bank	HDFC Bank Ltd	
	5-80,HMT Road,Chintal, Jeedimetla,Qutubulapur Mandal Dist. R R	
Branch	,Hyderabad-500054 Telangana	
Account No	50200048046980	
IFSC	HDFC0001041	
PAN No	AMPPC8374G	
GST N0	36AMPPC8374G1ZP	